


# Data Sheet



unit: mm


## Standard Accessories

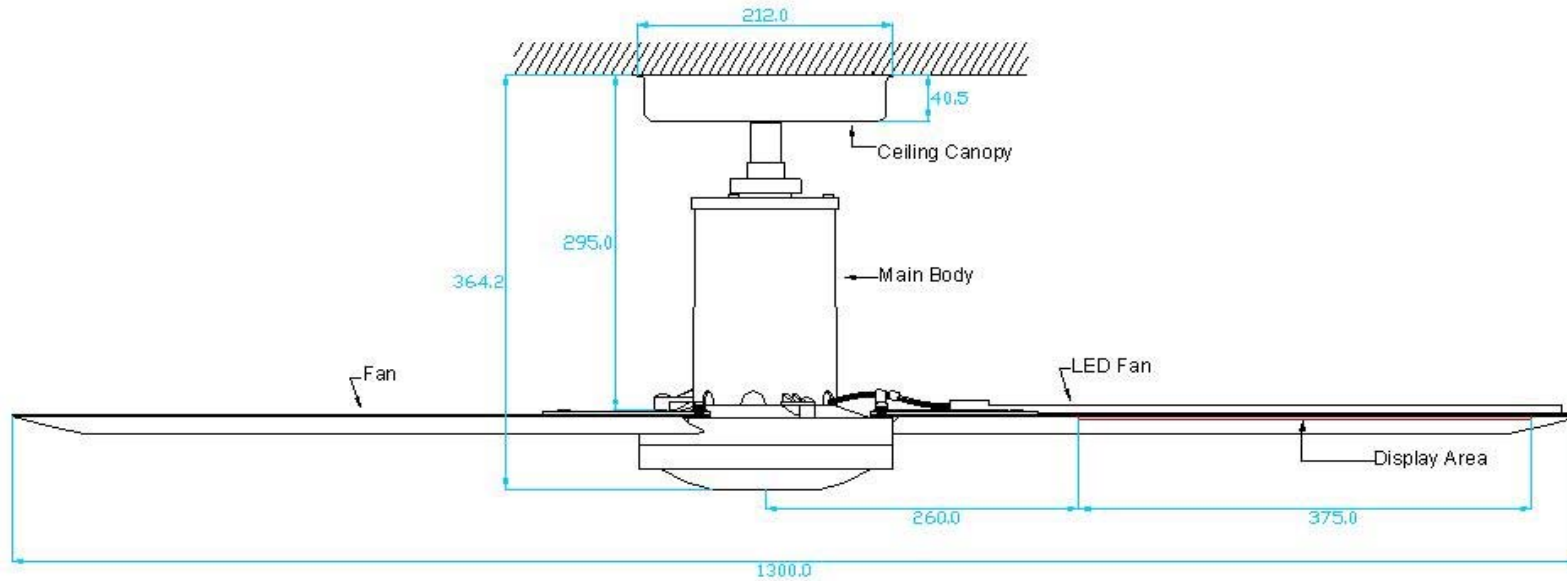

Switching power X 1



RS232 cable X 1



Software CD X 1





# Specifications

---

DISPLAY METHOD: Using an afterimage effect caused by the rotation of 85 color pixels high LEDs giving 72,000 virtual pixels.

- DISPLAY COLOR: 8 Colors
- COMMUNICATION METHOD: RS232. RS485.TCPIP connection .Modem, BlueTooth and GPRS control.
- EDITING FUNCTION: Editors that operate in Windows environment.
- INPUT VOLTAGE: 100v ~ 240v.
- Motor speed: 280 / rpm.
- Power consumption : 120 W.( max)
- CONTROL FUNCTION:REAL TIME CONTROL OF ALL FUNCTIONS AND TEXT.
- MEMORY:64Mb of image memory.
- DISPLAY RADIUS: 120 cm.
- Gross W EIGHT: 7.4 kg .
- DISPLAY AREA: 85 dot height x after image width.
- Packing: 1 pc / carton / 9 kgs
- Carton dimension: 25 x 30 x 65 cm
- WARRANTY: 1 year.